
J-VICE Pile Kit

12kN Fixing Capacity for Anchor and Braced Piles



- This brochure contains Glass Vice J-Vice 12kN Pile Fixing details.
- All subfloor construction and framing member sizes must be in accordance with NZS 3604:2011.
- Joists must have lateral support within 300mm of bearer as per clause 7.1.2 of NZS3604:2011.
- A solid blocking is required directly over a braced pile or an anchor pile.
- The brackets are Grade 304 Stainless Steel and the screws are Grade 316 Stainless Steel. Both are suitable for sea spray zone conditions
- Minimum SG8 or better timber piles/bearers and joists required.
- All screws are 14g x 44mm SS Grade 316 Hex Head Screws



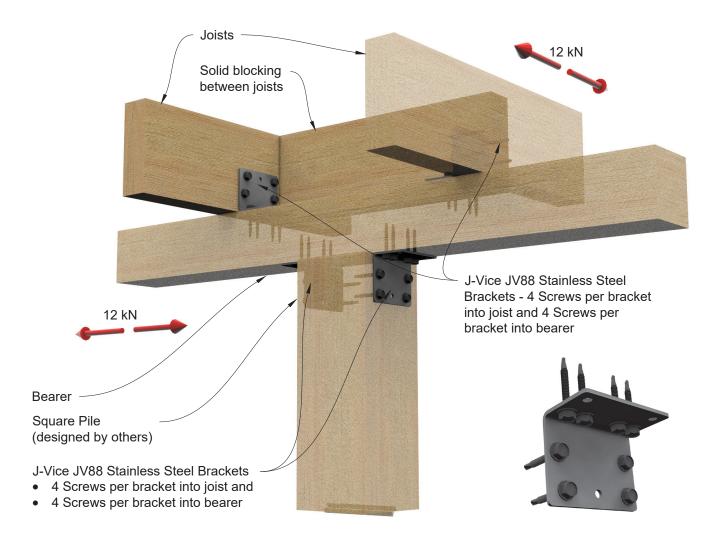



